



earth friendly chemistry

www.epasia.net

E P TM BLOCK SEAL

Utilising advanced acrylic technology, combined with Polyester Polymer. This formula outperforms all other aliphatic solutions currently in the market place.

This latest product was specially developed for concrete blocks used in retaining walls and general construction.

Some benefits are;

- ✓ High surface tension – easier stain removal properties
- ✓ Two applications
- ✓ Non toxic – non hazardous – non flammable
- ✓ High chemical resistance
- ✓ Prevents fretting mortar
- ✓ Compatible with all conventional sealants , adhesives & paint
- ✓ Penetrates & protects from within

Theoretical Coverage: 4-5 M2 per litre

Application Method: Brush, roll-on or back-pack sprayer.

Packaging Size: 5 ltr - 20ltr - 220 ltr – 1000ltr IBC

Shelf Life: 12 months minimum from date of manufacture when maintained in protected storage @ 5 – 38 °C.

DO NOT STORE IN STRONG SUNLIGHT.

Maintain unused material in closed containers in protected storage



easy to use eco-friendly non toxic non flammable non Hazardous
no mixing no special equipment non hazardous easy to use
COATINGS - CLEANERS - DEGREASERS - WATERPROOFING SYSTEMS

APPLICATION INSTRUCTIONS

1. Check block work for damage or cracking before application of EP™ Block
2. Use a low-pressure sprayer (Back -pack type) or any spray, operated at no more than 20 Psi
3. Spray entire surface area using approximately 1 Litre per 4 –5 square metres, apply second coat within 30 to 45 mins
4. Critical that any missing mortar and cracks are repaired prior to sealing we recommend using EP™ Bondex for repair mortars


EP™ Block Seal is best applied by spray method; this is not only fast and effective but also gives the correct application rate.

Allow a few days for completion of curing process and penetration.

Allow to dry completely prior to the application of paint if that is desired.

EP™ Block Seal will provide a long lasting, problem free bond for paints, prevents peeling, blistering and cracking.

EP™ Block Seal will not harm glass, tile or aluminium.

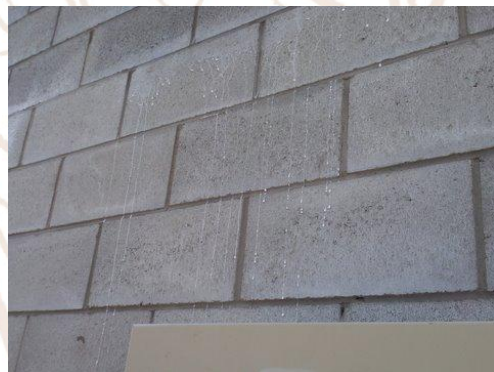

EP Borneo Sdn Bhd - No. 10 Jalan PJU 3/40 - Sunway Damansara
Petaling Jaya 87410 - Selangor, Malaysia - Tel: + 603 7885 0150
Fax: + 603 7885 0150 - Email: contactus@epasia.net

easy to use eco-friendly non toxic non flammable non Hazardous
COATINGS - CLEANERS - DEGREASERS - WATERPROOFING SYSTEMS
no mixing no special equipment non hazardous easy to use